


Pipe support distance

Max. distances of the pipe support depend on temperature, fluid and type of pipe.

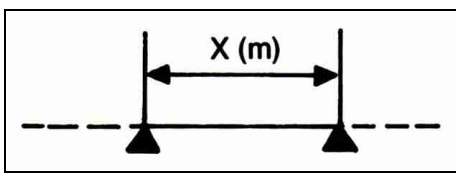

Max. distances of the pipe supports in meters depend on temperature, fluid and type of pipe

DN	Pipe with fluid Temp. < 160 C [m]	Pipe with steam Temp. > 160 C [m]	Pipe with fluid with insulation Temp. < 315 C [m]	Pipe with fluid with insulation Temp > 316 C [m]	Pipe with steam with insulation Temp. < 315 C [m]	Pipe with steam with insulation Temp. > 316 C [m]
15	2,5	3,0	2,2	1,7	2,8	2,5
25	3,0	3,5	2,5	2,0	3,1	2,8
32	3,5	4,0	3,1	2,6	3,6	3,1
50	4,0	4,5	3,6	3,2	4,1	3,8
65	4,3	5,5	4,1	3,5	5,1	4,5
80	4,5	6,0	4,5	4,0	5,5	4,8
100	5,0	6,0	4,7	4,2	5,6	5,1
125	5,5	6,5	5,5	4,8	6,2	5,8
150	6,0	7,5	5,8	5,0	7,1	6,3
175	6,5	8,0	6,1	5,3	7,6	6,8
200	7,0	8,5	6,5	5,6	8,0	7,2
250	7,5	10,0	7,5	6,5	9,5	8,5
300	8,0	10,5	7,9	7,0	10,2	9,0
350	9,0	11,5	8,6	7,6	10,8	9,6
400	9,5	12,5	9,0	8,2	11,8	10,5
450	10,0	13,5	9,5	8,5	12,5	11,1
500	10,5	14,0	10,2	9,1	13,2	11,6
600	11,5	15,0	11,0	9,6	14,3	12,6

Changes are possible without notice.